

## HALOSTAR 50 W 24 V GY6.35

---

HALOSTAR 24 V | Low-voltage (24 V) pin based halogen lamps



### Product benefits

---

- Base pins are tempered to protect against corrosion
- Axial filament ensures optimum directional light
- High illuminance level
- Contains no mercury, can be thrown away with normal household waste



## Technical data

---

### Electrical data



Rated wattage	50 W
Nominal wattage	50 W
Rated power factor $\lambda$	1.00

### Light technical data

Nominal luminous flux	900 lm
Rated luminous flux	900 lm
Color temperature	3000 K
Color rendering index Ra	100
Starting time	0.0 s
Warm-up time (60 %)	0 s
Lumen main.fact.at end of nom.life time	0.80

### Dimensions & weight

Overall length	44.0 mm
Diameter	12.0 mm
Light center length (LCL)	30.0 mm
Outer bulb	T12

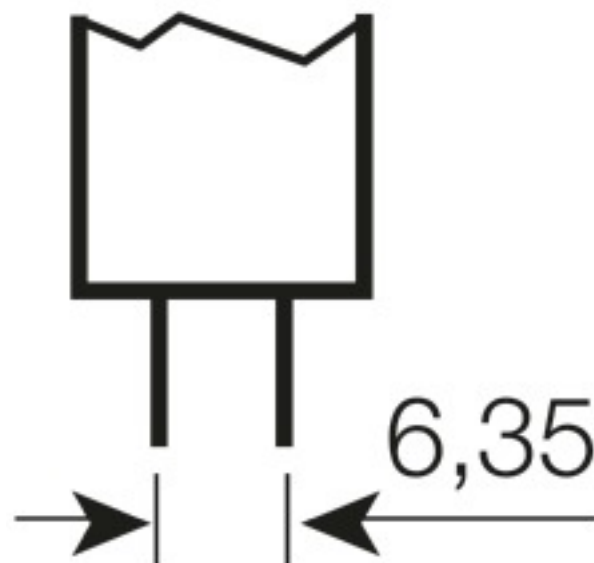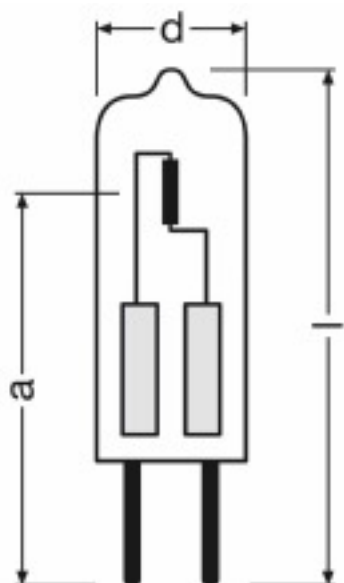

Product line drawing with letters

Base

### Colors & materials

Lamp mercury content	0.0 mg
Mercury-free	Yes

### Lifespan

Nominal lamp life time	2000 h
Rated lamp life time	2000 h
Number of switching cycles	1000000 <sup>1)</sup>

<sup>1)</sup> At 1 min on / 3 min off

### Additional product data

Base (standard designation)	GY6.35
Footnote used only for product	Quick-acting miniature fuse needed acc. to EN60432-2

**Capabilities**

<b>Dimmable</b>	Yes
<b>Burning position</b>	Any

**Country specific categorizations**

<b>ILCOS</b>	HSGT/C/UB-50-24-GY6,35-12/30
<b>Order reference</b>	64445 U AX

## Disclaimer

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.